

## LCM Series


# Constant Current LED Driver

LED恒流驱动器

## Features:

- Super slim design
- Analogue flicker-free
- Configurable constant current output via dip-switch
- Push wire connections
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Driver for built-in use
- Suitable for protection class I luminaires
- Protection class I

- 超细长紧凑设计
- 无频闪
- 通过拨码开关选择输出电流
- 按压式接线端子
- 输出开路, 短路, 过载和过温保护
- 符合安全特低电压标准
- 内置式驱动运用
- 适用I类灯具
- 保护等级I

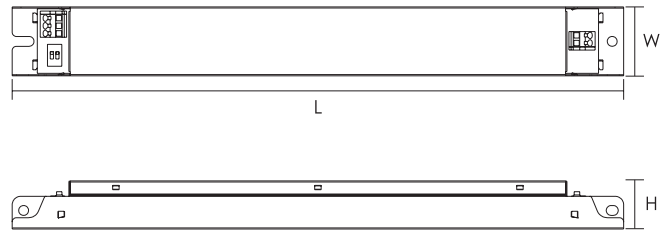

## Parameters:

Model No.	Input voltage	Max. output	Output current	Output voltage	Power factor	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
LCM-40L	220-240	20	350	42-58	0.85C	88	<0.5	-20...+50	80	SELV	210x31.5x22	220
		29	500	42-58	0.95	88						
		32	550	42-58	0.95	87						
		40	700	42-58	0.95	87						
LCM-40	220-240	29	500	42-58	0.95	88	<0.5	-20...+50	80	SELV	210x31.5x22	220
		32	550	42-58	0.95	88						
		38	650	42-58	0.95	87						
		40	700	42-58	0.95	87						
LCM-40H	220-240	27	700	27-38	0.95	88	<0.5	-20...+50	80	SELV	210x31.5x22	220
		32	850	27-38	0.95	88						
		34	900	27-38	0.95	87						
		40	1050	27-38	0.95	87						
LCM-60	220-240	40	700	42-58	0.95	89	<0.5	-20...+50	80	SELV	280x31.5x22	260
		50	850	42-58	0.95	89						
		52	900	42-58	0.95	88						
		60	1050	42-58	0.95	88						
LCM-60H	220-240	45	1050	30-43	0.95	89	<0.5	-20...+50	80	SELV	280x31.5x22	260
		52	1200	30-43	0.95	89						
		56	1300	30-43	0.95	88						
		60	1400	30-43	0.95	88						
LCM-70	220-240	50	850	42-58	0.95	90	<0.5	-20...+50	80	SELV	360x30x21.5	280
		52	900	42-58	0.95	90						
		60	1050	42-58	0.95	89						
		70	1200	42-58	0.95	89						
LCM-80	220-240	60	1050	42-58	0.95	91	<0.5	-20...+50	85	SELV	360x30x21.5	300
		70	1200	42-58	0.95	91						
		76	1300	42-58	0.95	92						
		82	1400	42-58	0.95	92						
LCM-100	220-240	68	700	64-96	0.95	91	<0.5	-20...+50	85	SELV	360x30x21.5	320
		81	850	64-96	0.95	91						
		87	900	64-96	0.95	92						
		100	1050	64-96	0.95	92						

