

## LCS Series


# Constant Current LED Driver

LED恒流驱动器

## Features:

- Super slim design
- Driver for built-in use
- Push wire connections
- For use in luminaires of protection class I
- High power factor
- high efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Suitable for use in emergency lighting systems
- SELV equivalent

- 超细长紧凑设计
- 内置式驱动
- 按压式接线端子
- 适用I类灯具
- 高功率因数设计
- 高效率, 温升低
- 输出开路, 短路, 过载和超温保护
- 适用紧急照明控制系统
- SELV等

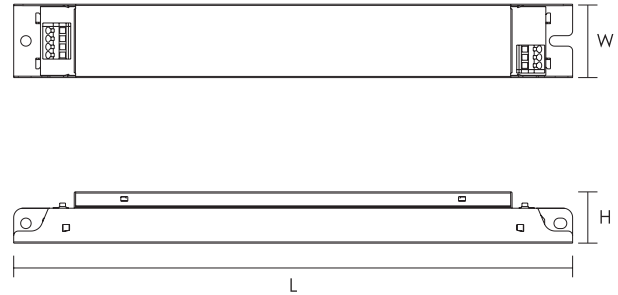

## Parameters:

Model No.	Input voltage	Max. output	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
LCS-40-700/350	220-240	40	700/350	20-57	0.95	<15	88	<0.5	-20...+50	85	SELV	240X31.5X22	205