




## NTSeries

# TRIAC Dimming LED Driver

可控硅调光LED驱动器

## Features:

- Dimmable with leading edge or trailing edge dimmer
- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Wide output voltage extended down to 50%
- High power factor >0.95
- High efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV class II output
- Smooth dimming compatible with most dimmer
- Dimming range from 1...100%
- 适用普通可控硅前切相或后切相调光器
- 超小体积，独立式紧凑型设计
- 简便自锁式压线盖
- 螺丝锁紧大接线端子，方便多规格线接驳
- 50%宽输出电压范围
- 高功率因数>0.95
- 高效率，高可靠性，长寿命
- 输出开路，过载，短路和过温保护
- 安装经济便捷
- SELV和II等级
- 平滑高性能调光，匹配更多的调光器
- 调光范围 1...100%光通量

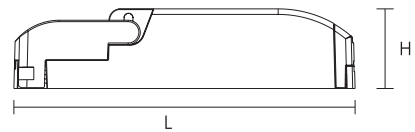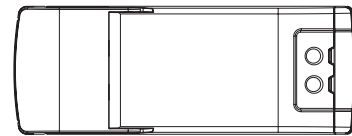

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output power 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
D17518NT	220-240	18	175	52-103	0.95	87	<1.0	-20...+50	80	SELV	120x45x28	100
D30018NT	220-240	18	300	31-62	0.95	86	<1.0	-20...+50	80	SELV	120x45x28	100
D35018NT	220-240	18	350	26-52	0.95	86	<1.0	-20...+50	80	SELV	120x45x28	100
D38018NT	220-240	18	380	24-48	0.95	86	<1.0	-20...+50	80	SELV	120x45x28	100
D45018NT	220-240	18	450	20-41	0.95	86	<1.0	-20...+50	80	SELV	120x45x28	100
D50018NT	220-240	18	500	18-36	0.95	86	<1.0	-20...+50	80	SELV	120x45x28	100
D70018NT	220-240	18	700	13-26	0.95	85	<1.0	-20...+50	80	SELV	120x45x28	100
D105018NT	220-240	18	1050	9-18	0.95	85	<1.0	-20...+50	80	SELV	120x45x28	100
D140018NT	220-240	18	1400	7-13	0.95	84	<1.0	-20...+50	80	SELV	120x45x28	100
D26020NT	220-240	20	260	38-77	0.95	85	<1.0	-20...+50	80	SELV	120x45x28	100
D26025NT	220-240	25	260	48-95	0.95	88	<1.0	-20...+50	80	SELV	120x45x28	100
D30025NT	220-240	25	300	44-88	0.95	88	<1.0	-20...+50	80	SELV	120x45x28	100
D35025NT	220-240	25	350	36-72	0.95	88	<1.0	-20...+50	80	SELV	120x45x28	100
D50025NT	220-240	25	500	25-50	0.95	88	<1.0	-20...+50	80	SELV	120x45x28	100
D55025NT	220-240	25	550	23-46	0.95	87	<1.0	-20...+50	80	SELV	120x45x28	100
D60025NT	220-240	25	600	21-42	0.95	87	<1.0	-20...+50	80	SELV	120x45x28	100
D70025NT	220-240	25	700	18-36	0.95	87	<1.0	-20...+50	80	SELV	120x45x28	100
D80025NT	220-240	25	800	16-31	0.95	87	<1.0	-20...+50	80	SELV	120x45x28	100
D105025NT	220-240	25	1050	12-24	0.95	87	<1.0	-20...+50	80	SELV	120x45x28	100