

Q4 Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II

- 超小体积，独立式紧凑型设计
- 简便自锁式压线盖
- 螺丝锁紧大接线端子，方便多规格线接驳
- 输出开路，短路，过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 保护等级 II

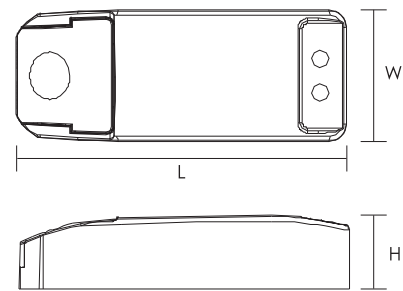

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
Q4-160mA-6W	220-240	6	160	18-39	0.55C	82	<0.3	-20...+50	80	SELV	81x39x22	50
Q4-210mA-12W	220-240	12	210	2-57	0.80C	82	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-240mA-12W	220-240	12	240	2-50	0.80C	82	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-260mA-12W	220-240	12	260	2-46	0.80C	82	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-300mA-12W	220-240	12	300	2-40	0.80C	82	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-310mA-12W	220-240	12	310	2-38	0.80C	82	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-350mA-6W	220-240	6	350	9-18	0.55C	80	<0.3	-20...+50	80	SELV	81x39x22	50
Q4-350mA-12W	220-240	12	350	2-34	0.80C	81	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-350mA-20W	220-240	20	350	2-58	0.80C	85	<0.3	-20...+50	80	SELV	113x44x28	100
Q4-500mA-6W	220-240	6	500	6-12	0.55C	78	<0.3	-20...+50	80	SELV	81x39x22	50
Q4-500mA-12W	220-240	12	500	2-24	0.80C	82	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-500mA-20W	220-240	20	500	2-40	0.80C	83	<0.3	-20...+50	80	SELV	113x44x28	100
Q4-600mA-20W	220-240	20	600	2-34	0.80C	82	<0.3	-20...+50	80	SELV	113x44x28	100
Q4-700mA-6W	220-240	6	700	6-9	0.55C	77	<0.3	-20...+50	80	SELV	81x39x22	50
Q4-700mA-12W	220-240	12	700	2-17	0.80C	81	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-700mA-20W	220-240	20	700	2-29	0.80C	82	<0.3	-20...+50	80	SELV	113x44x28	100
Q4-1050mA-6W	220-240	6	1050	2-6	0.55C	75	<0.3	-20...+50	80	SELV	81x39x22	50
Q4-1050mA-12W	220-240	12	1050	2-12	0.80C	80	<0.3	-20...+50	80	SELV	98x39x22	60
Q4-1050mA-20W	220-240	20	1050	2-19	0.80C	82	<0.3	-20...+50	80	SELV	113x44x28	100